


2. PTMount for the S15D

Manual pan-tilt mount for the S15D (ceiling or wall installation)

MOBOTIX offers the high-quality, weatherproof PTMount (IP66), an attractive, compact, discreet, and dome-shaped accessory mount that holds a single sensor module and is adjustable in three directions. The maximum flexibility possible when adjusting the modules means that you can always find the right position. When mounted to a wall, for example, the mount enables you to compensate for sideway tilt and to re-align the image horizon horizontally to record the best possible image of the area to be secured.

Axis 1: Tilting

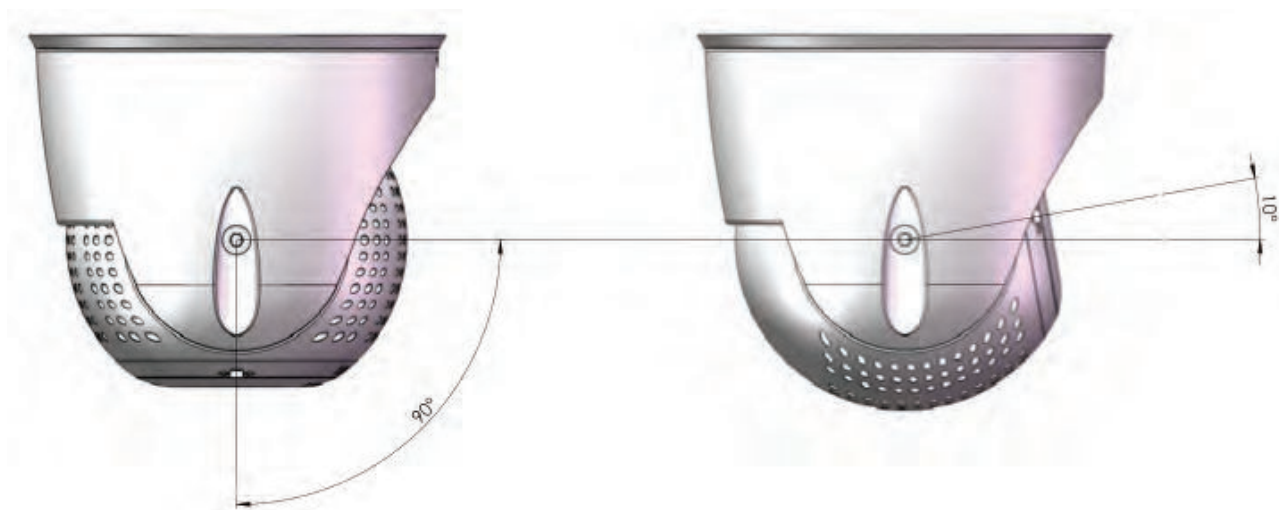

Axis 2: Panning the PTMount on a wall/ceiling



Axis 3: Rotating the sensor module in the PTMount



The PTMount accepts all sensor modules for the M15D and S15D (but not thermal sensor modules or BlockFlexMount modules). **Two PTMounts** turn the S15D into a flexible double-dome camera – ideal, for example, in simultaneous use in two rooms (e.g., 2 x ceiling installation, see figure below), or one sensor module each on the wall and ceiling.



Two PTMounts turn the S15D into an attractive double-dome camera, and the camera housing, including the connection cable and storage medium, can all be installed discreetly (concealed) and tamper-proof!

PTMount - Highlights

Rounding out of the mounting accessory line for the S15D

Flexible expansion of installation options for wall and ceiling mounting for both indoor and outdoor use

Elegant design, high-quality materials and workmanship

Rotating sensor module mounting for easy image orientation

Suitable for all optical sensor modules for the S15D and S14D

Delivery includes **seal, mounting plate** (rotary disk), **mount with insert**, screws, Allen wrench, instructions



IMPORTANT:

- ➔ The PTMount is NOT suitable for use with the new thermal sensor modules for the S15D. We are currently designing a special version for this application.
- ➔ A black module key is required to install the sensor modules (and is always included within the scope of delivery with an S15D).
- ➔ Cables are guided into the PTMount so that they cannot be seen and tampered with, as the cables are always behind the wall and guided into the mount from above or below.

PTMount for S15D ordering information:

Article number	EAN	Description	MSRP in EUR	Available
MX-PTMount-OPT-PW	4047438021166	Manually adjustable pan-tilt mount for optical sensor modules, white	58	July 15, 2014

